
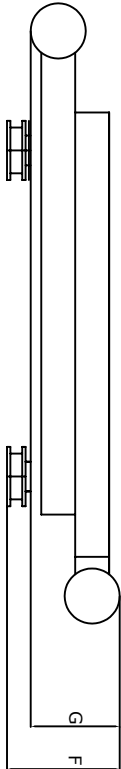


TRAVERSE DOPPIO SFILO STABILIZERS WITH DOUBLE EXTENSION

Idrrauliche Hydraulics

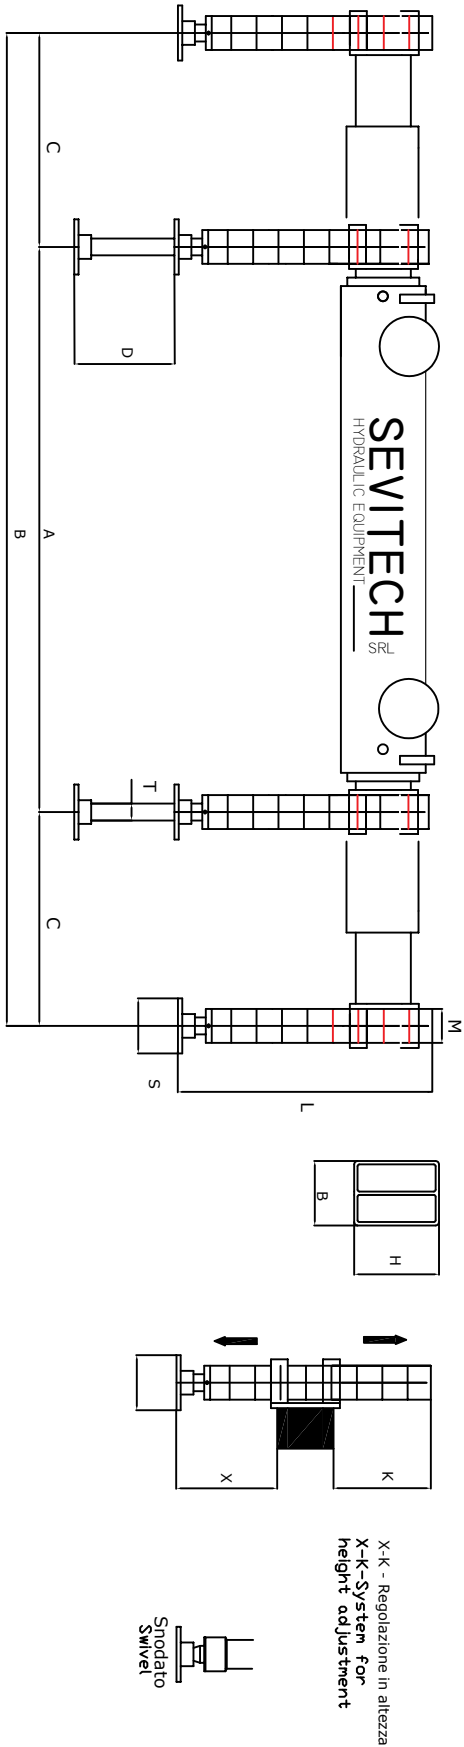

Gru Crane	Ton-m	dan-Max	Mod.	DIMENSIONI Dimensions (cm)										Regolazione in altezza System for height adjustment					PESO Weight Kg	ACCESSORI Options				
				A	B	H x B	C	D	F	G	S	T	X	K	L	M	1	2		3	4	5		
50-80	15000		ST5-SHX.50.2300 S	2300	6900	350x320	2300	460	560	350	200	90	150-700	0-440	850	120	1040	■	■	—	—	■		
			ST5-SHX.50.2300 L					600					145-800	0-580	1000		1070	■	■	—	—	■		
70-100	19000		ST6-SHX.60.2800 S	2300	7900	440x330	2800	460	660	350	200	90	115-650	0-460	850	120	1540	■	■	—	—	■		
			ST6-SHX.60.2800 L					600					115-750	0-610	1000		1570	■	■	—	—	■		
80-120	25000		ST7-SHX.70.3000 S	2350	8350	550x350	3000	460	750	550	200	100	80-670	0-470	850	140	2030	■	■	—	—	■		
			ST7-SHX.70.3000 L					600					80-670	0-620	1000		2080	■	■	—	—	■		

□ Standard Standard

1	Valvole doppie Double valves	2	Piattello snodato Swivel foot	3	Comandi bilaterali Dual side controls	4	Prolunga stelo Rod extension	5	Avvolgitori Hose reels
					120 mm				