


TRAVERSE CON ASTE IN LINEA STABILIZERS WITH OPPOSED RODS

Manuali e Idrauliche

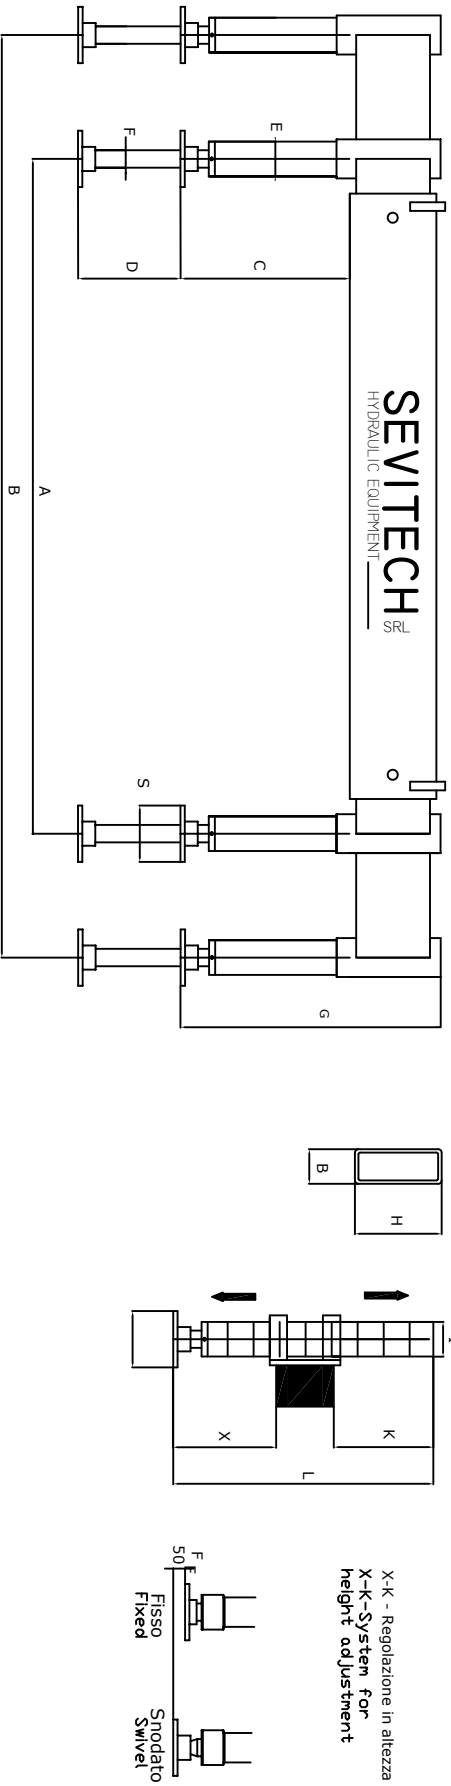

Δ A richiesta On request

[illegible]

Gru Crane Ton-m	Mod.	DIMENSIONI Dimensions (mm)						45°-90° STANDARD CILINDRO GREIOLE Rotating Cylinder	PESO Weight kg	ACCESSORI Options				
		A	H x B	D	E	F	S			1	2	3	4	5
2 - 4	1550	STA-SM-GIR	1800	120x80	330	70	40	160	112	Δ	Δ	Δ	Δ	—
4-10	2950	STO-SM-GIR	2100	150x100	400	70	40	160	148	Δ	Δ	Δ	Δ	—
10-23	6300	STI-SM-GIR	2100	200x100	450	85	60	160	155	■	Δ	Δ	Δ	—
					550				165	■	Δ	Δ	Δ	—
					450				220	■	Δ	Δ	Δ	—
18-35	8400	STZ-SM-S-GIR	2100	200x120	550	95	60	200	225	■	Δ	Δ	Δ	—

1	Valvole doppie Double valves	2	Piattello snodato Swivel foot	3	Comandi bilaterali Dual side controls	4	Prolunga steel Rod extension	5	Avvolgitori Hose reels
							STA-SM A.5005  100 mm ST1-SM 10.6005  120 mm ST2-SM 20.6005  120 mm		